

Spotlight Mount

Shape Your World

Achieve Greater Control


With the Spotlight Mount, Aputure enters into a whole new class of modifiers with the introduction of the world's first Bowens spotlight mount. Achieve a greater degree of control with the Spotlight Mount's internal shutter blades for sharp cuts. Acquire pinpoint accuracy when projecting your light with your choice of 3 different lenses.



Main Features




Interchangeable Lens



Aluminum Alloy Die-Cast



Minimal Edge Fringing



Modular Design



Hi-Res Lens



Easy Sharp Cuts




Even Light Spread



Std. B-size Gobo



Removable Gel Frame



Std. Bowens mount




Dual Junior/Baby Mount



Low CCT Deviation



10X Output w/ 120d II



Multi-Slots for Gobo/IRIS



2K Resolution

What's In The Box




Specifications

1. Photometric

Distance	Light	19°		26°		36°		
		Original/Lux	Lux	Beam Diameter	Lux	Beam Diameter	Lux	Beam Diameter
1m	C120d II	6100	62200	25cm	37500	42cm	19620	60cm
	C120d	3900	37300	25cm	24450	42cm	12970	60cm
	C300d	9050	60000	25cm	46600	42cm	32500	60cm
1.5m	C120d II	2464	23590	42cm	13900	66cm	8040	90cm
	C120d	1742	15740	42cm	9910	66cm	5870	90cm
	C300d	3770	24330	42cm	20100	66cm	12350	90cm
3m	C120d II	711	6280	90cm	3620	133cm	2175	180cm
	C120d	457	3860	90cm	2387	133cm	1376	180cm
	C300d	1109	5970	90cm	4910	133cm	3250	180cm
5m	C120d II	300	2283	154cm	1281	220cm	772	300cm
	C120d	187	1435	154cm	855	220cm	509	300cm
	C300d	460	2300	154cm	1872	220cm	1270	300cm
10m	C120d II	105.3	554	314cm	318	440cm	196.8	600cm
	C120d	72.9	372	314cm	232	440cm	144.5	600cm
	C300d	161.3	560	314cm	498	440cm	332.7	600cm

2. Even Spread Test

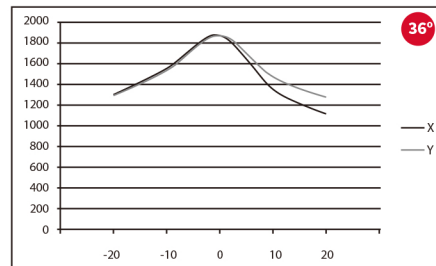

3. Size & Weight

Product Dimensions	434.5x218.7x357mm/17.1x8.6x14.1"
Box Dimensions	455x290x260mm/17.9x11.4x10.2"
Weight	19° 4.59kg/10.1lbs
	26° 5.02kg/11.1lbs
	36° 5.11kg/11.3lbs

Angle	Aperture	Focal Length (mm)
19	f/2.3	230
26	f/1.6	160
36	f/1.2	120



EXTRA LENSES SOLD SEPARATELY.